
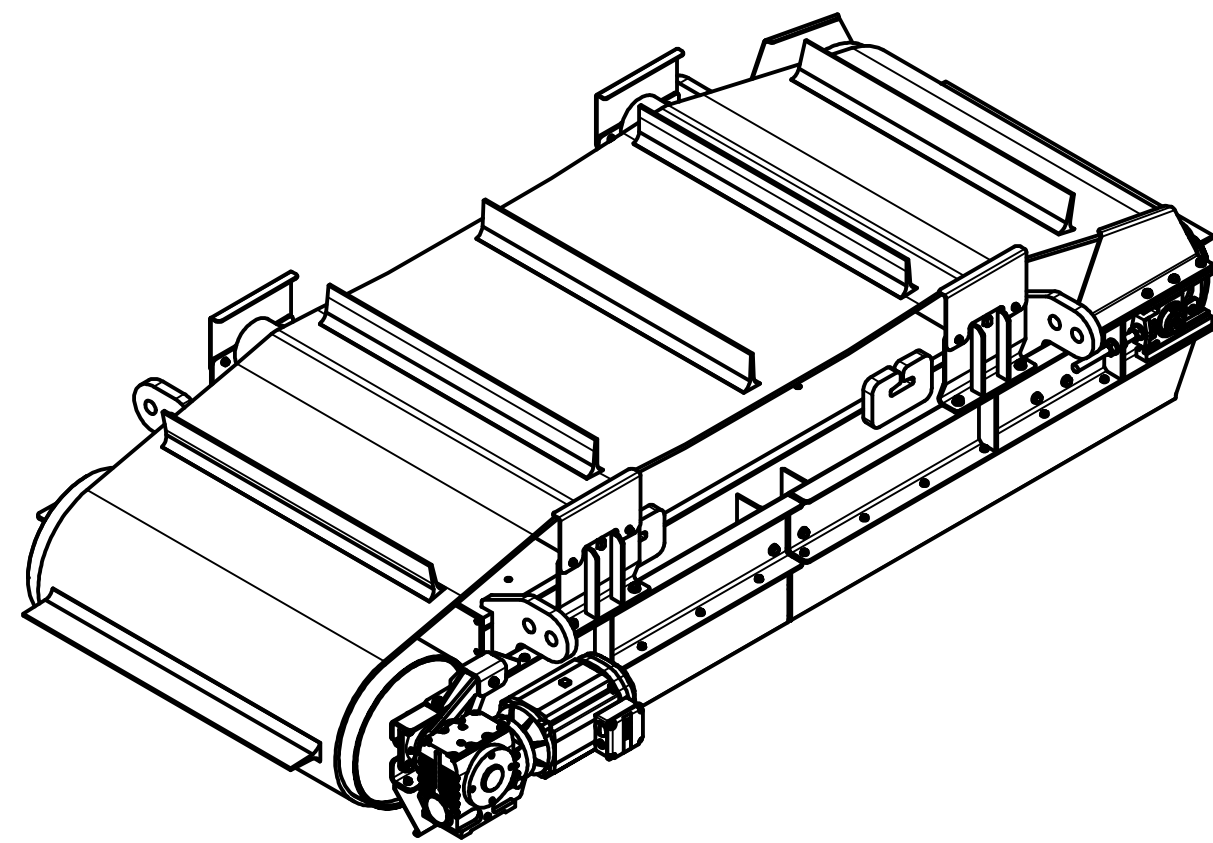
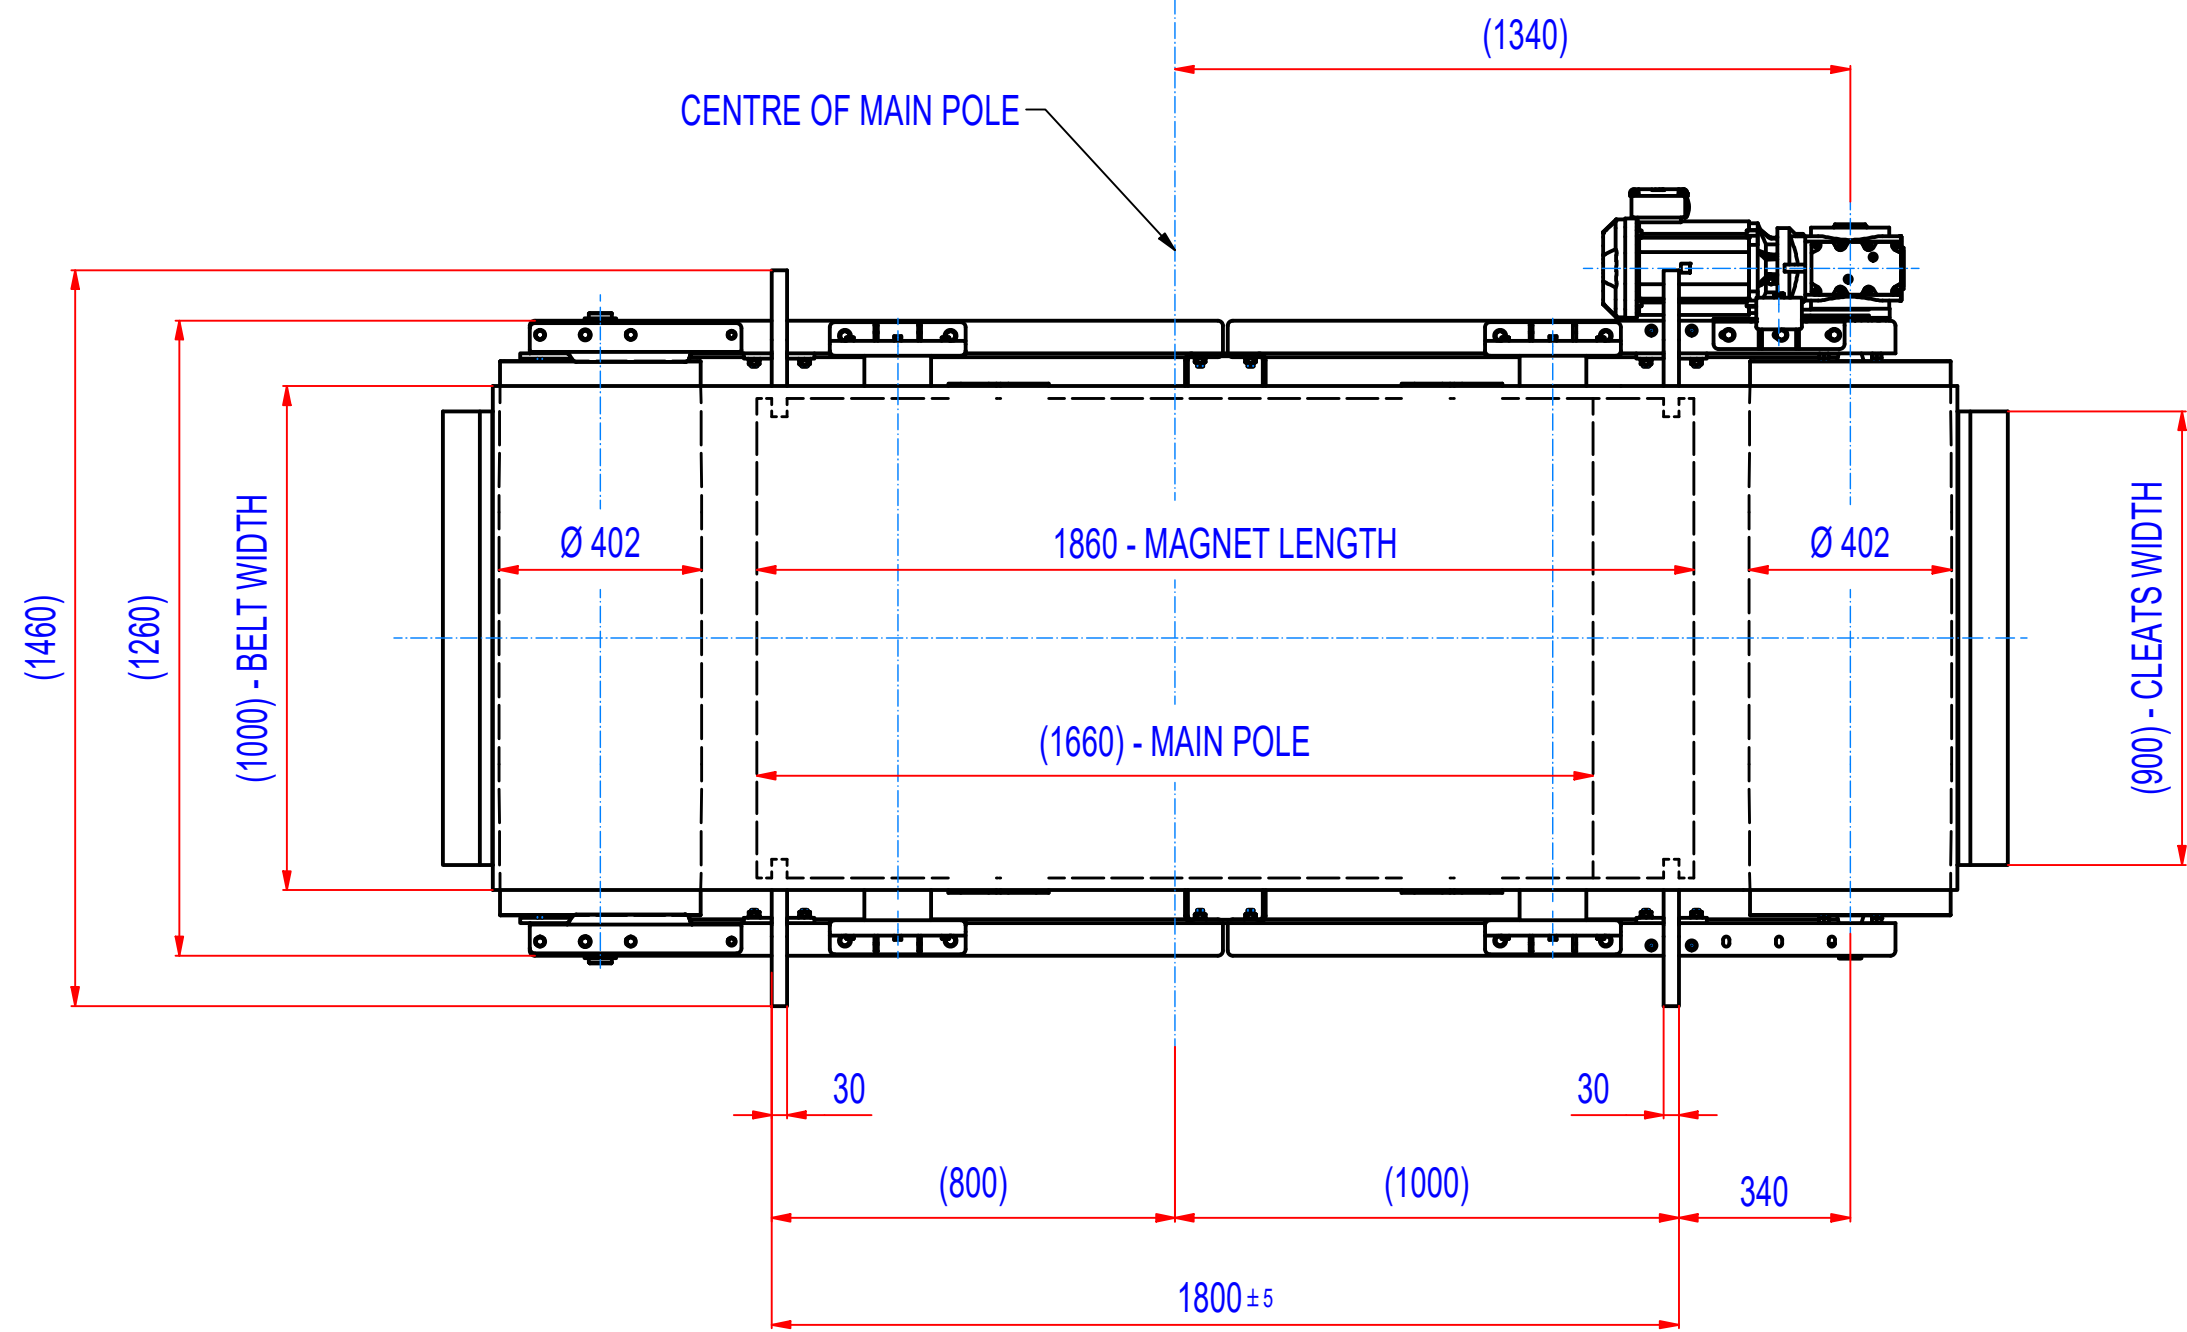
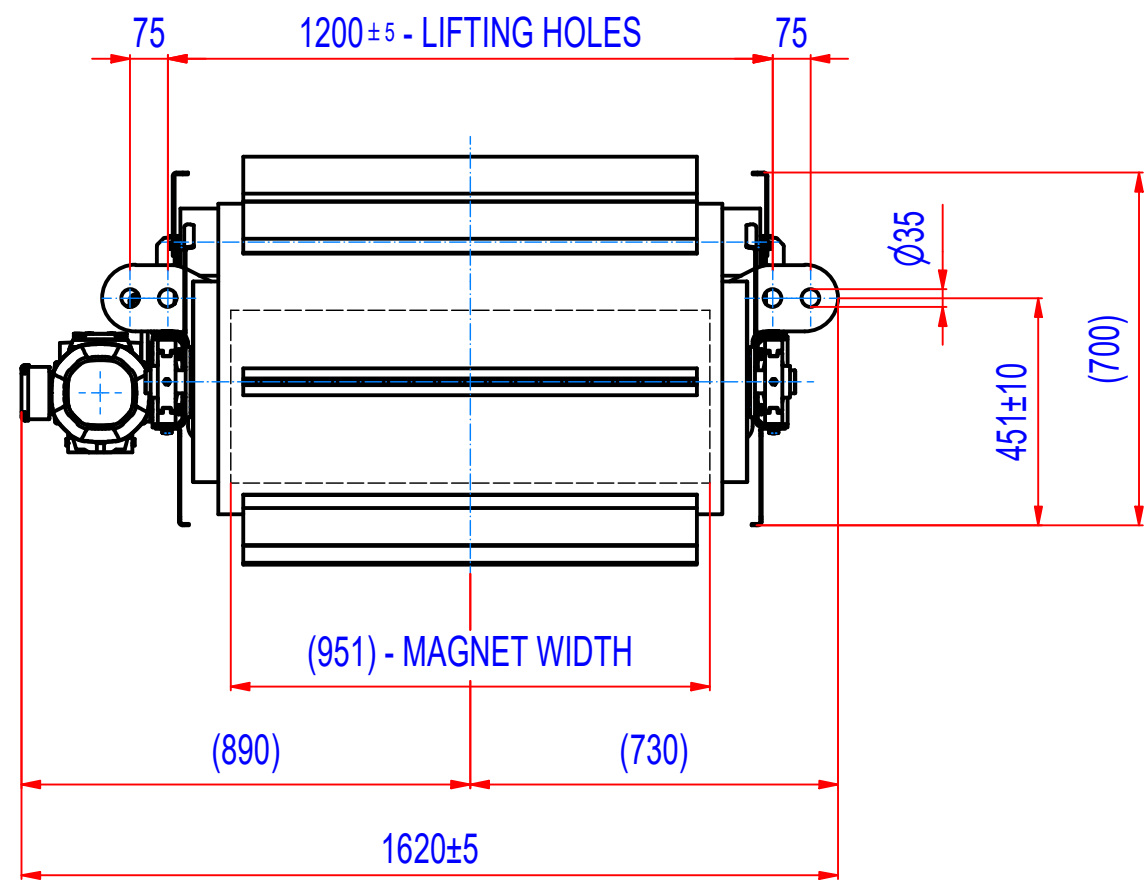


REV	BY	DATE	DESCRIPTION
-	EN	01.10.2018	ORIGINAL DRAWING
A	LF	30.09.2022	MOTOR IP55 (WAS IP54)

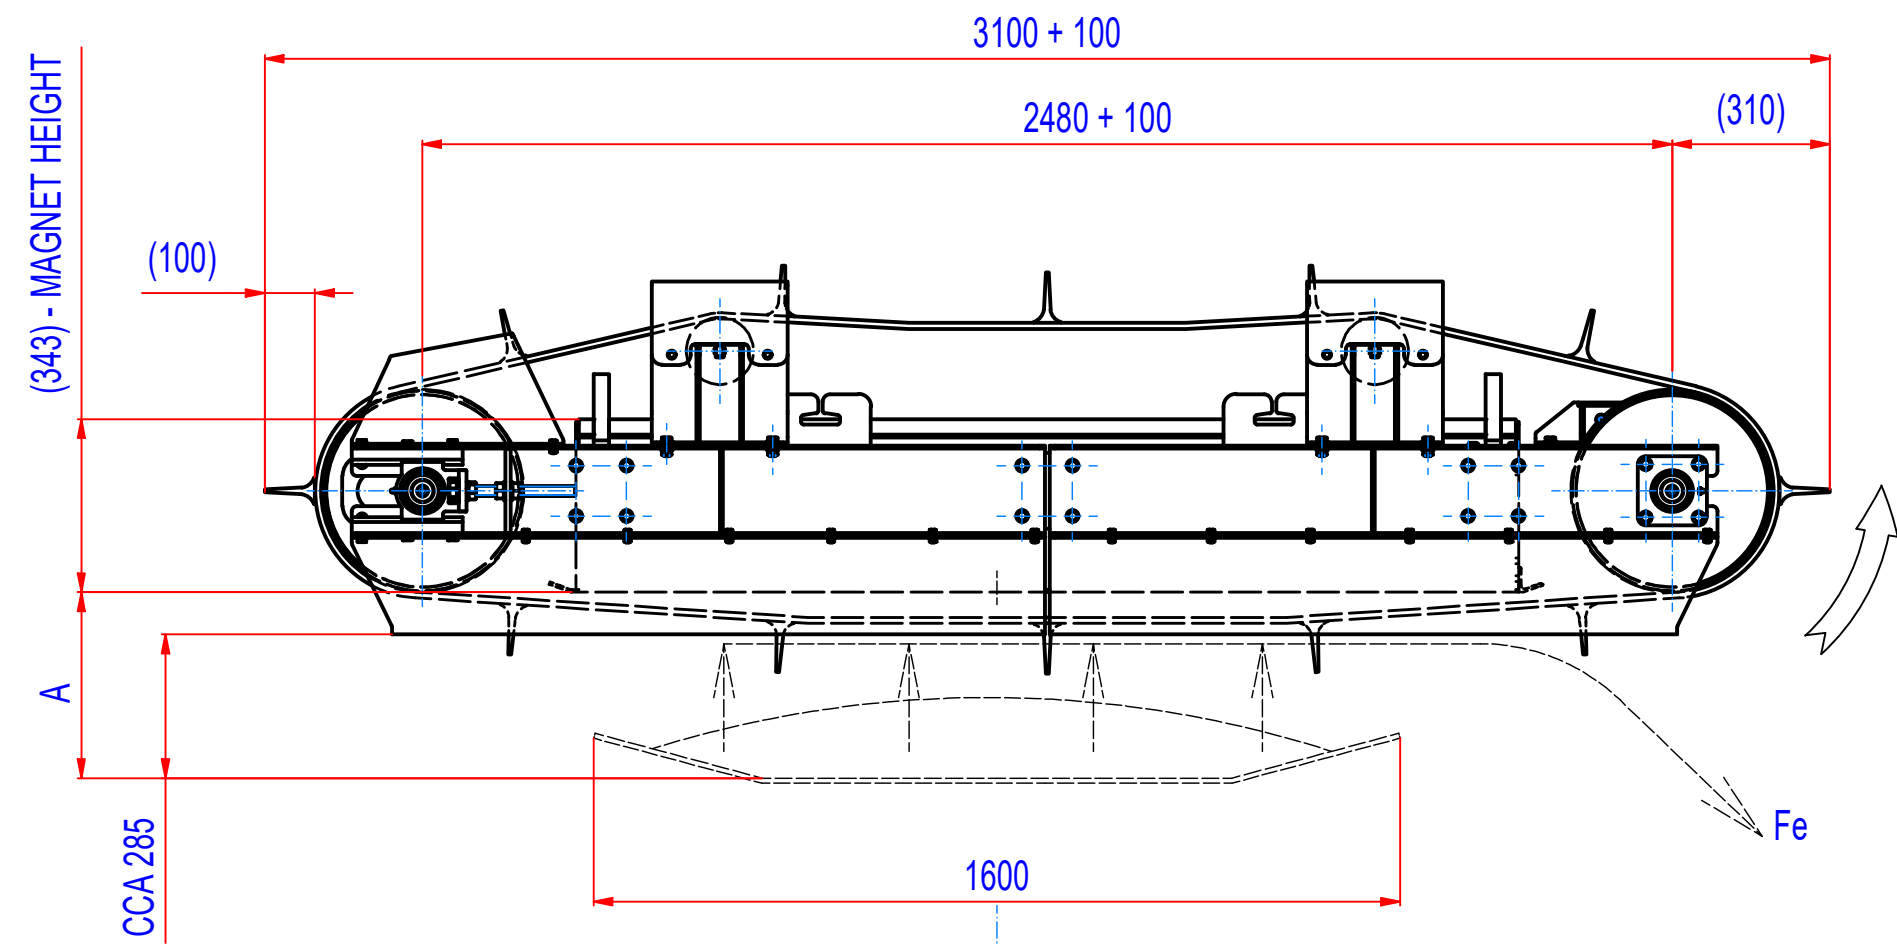

A = 430 mm - max. catch distance for rod Ø15, L=75 mm (VDE)
A = 370 mm - 400 Gs

- GEARED BOX SEW SA67/TDRN100L4, i=20,37 (71RPM), MOTOR 230/400V, 3kW, 50Hz, IP55
- DRUM SPEED 71/min
- BELT SPEED 1,5 m/s
- BELT EP500/4 5+2, LENGTH 6340, WIDTH 1000, 12 CLEATS T100/10, WIDTH 900

Sheet: A2	Extra info:	General tolerance: ISO 2768 - cL
Drawn: EN	Weight (kg): 3226,7 kg	Drawn according: ISO268; ISO1101; ISO2553
Date: 1.10.2018	Predecessor: SEPB160035	Status:
Quick search: XSPB 5	Description: Overband separator, Ferrite, Size 5, W1600, Cross	Customer reference number:
		Product key: ROP-F5-C-160-W-G-L-B-B-NA
		Part number: ROFC160350
		Rev: -