
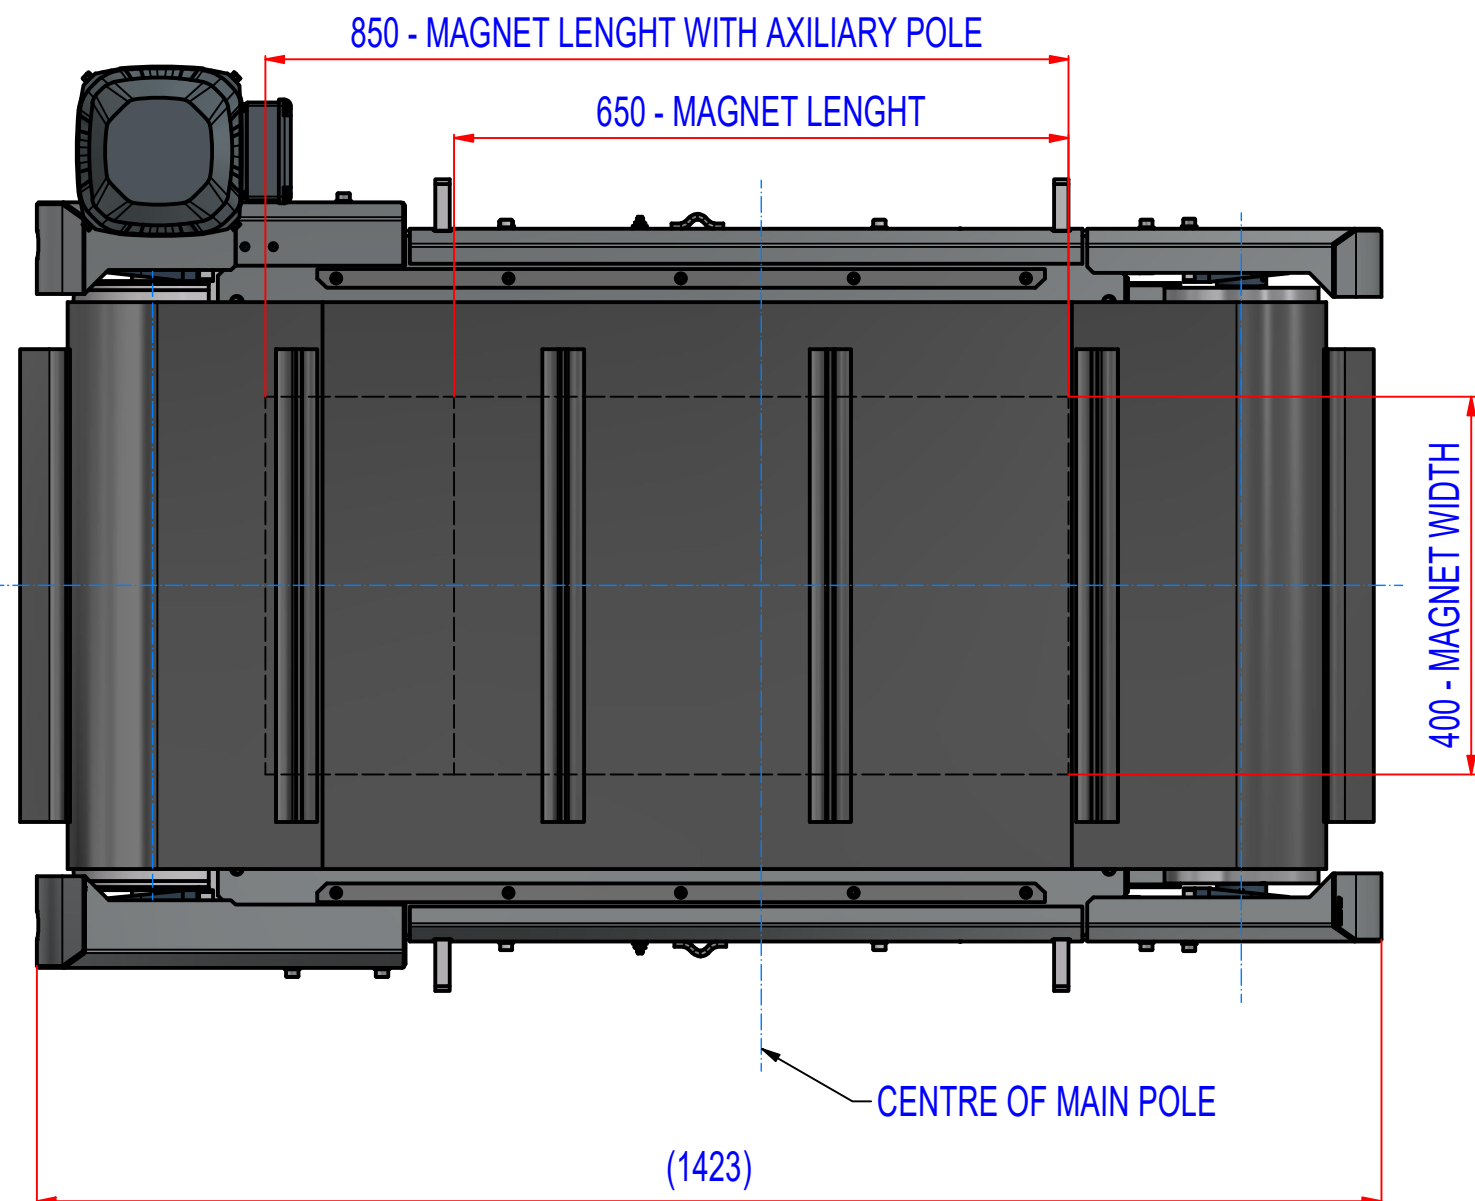
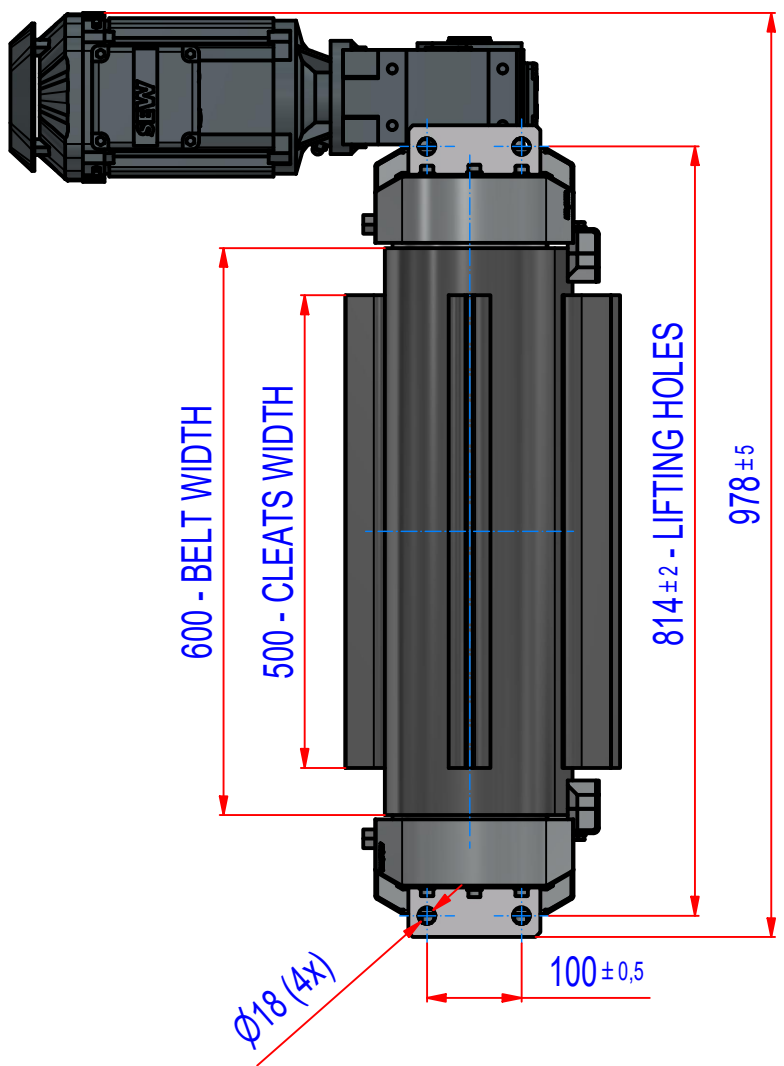
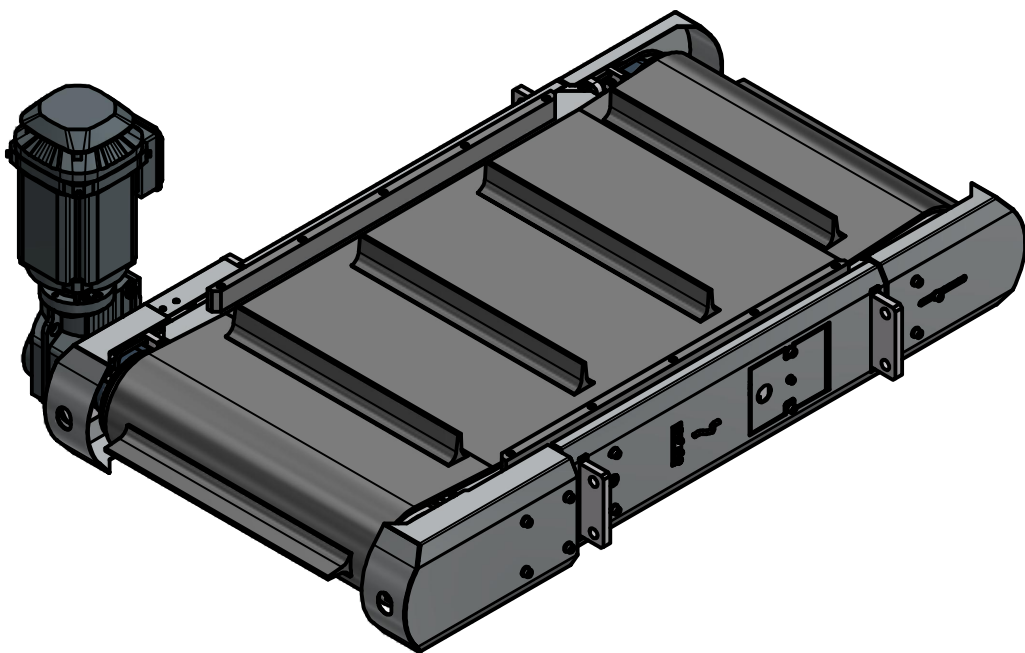


REV	DATE	BY	DESCRIPTION
-	01.09.2023	PH	Source RONC065341, size 3

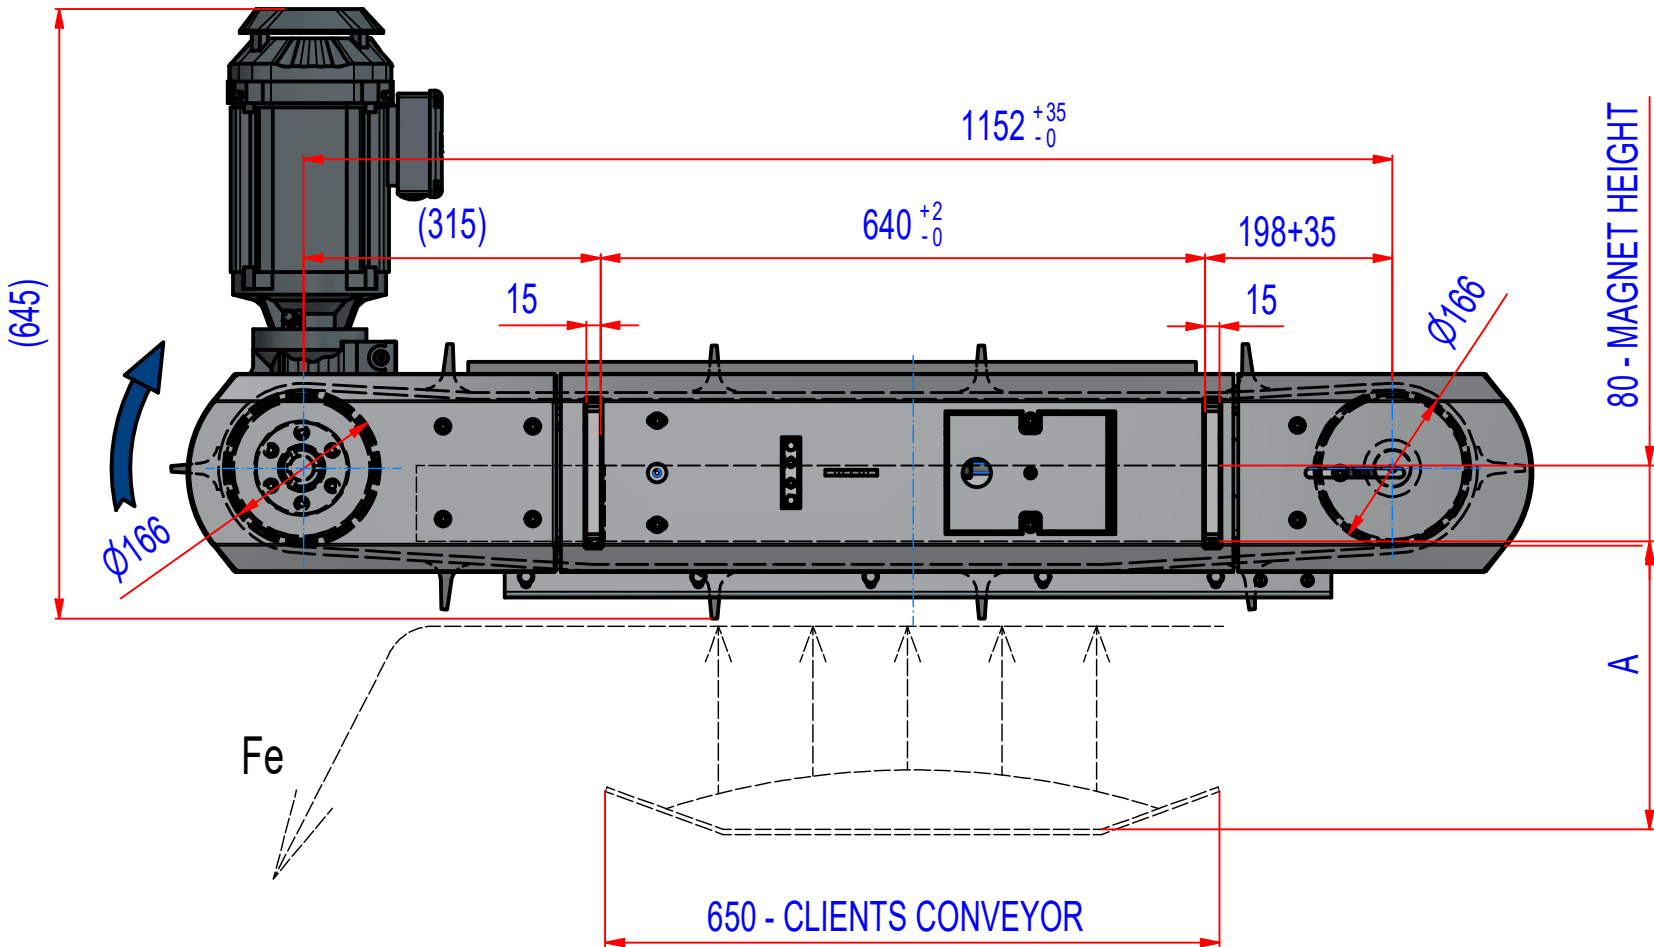

A = 310 mm - max. catch distance for rod $\phi 15$, L=75 mm (VDE)
A = 215 mm - 400 Gs

MAGNET : MAGNETS NdFeB, FERRITTE, WATERPROOF
FRAME: MADE FROM AISI 304
PROTECT PLATES: AISI 304, 2-3mm
BELT TYPE: EP250/2 3+1,5, WIDTH 600, LENGTH 2850,
10 CLEATS T50/20, WIDTH 500
MOTOR: SEW KA37DRN90L4/C i=7,96 (184RPM)
230/400V, 1,5 kW, IP55
ACCESSORIES: FRAME SIDE COVERS
GREASING FROM LEFT AND RIGHT SIDE

Sheet: A2	Extra info:	General tolerance: ISO 2768 - cL
Drawn: PH	Weight (kg): 358,2	Drawn according: ISO268; ISO1101; ISO2553
Date: 01.09.2023	GOUDSMIT MAGNETICS	Status:
Predecessor:		Customer reference number:
Quick search:		Product key: ROP-N3-C-065-W-G-R-B-B-M-NA
Description: Overband magnet, NdFeB, size.3, W0650, gear motor	Part number: RONC065331	Rev: -