
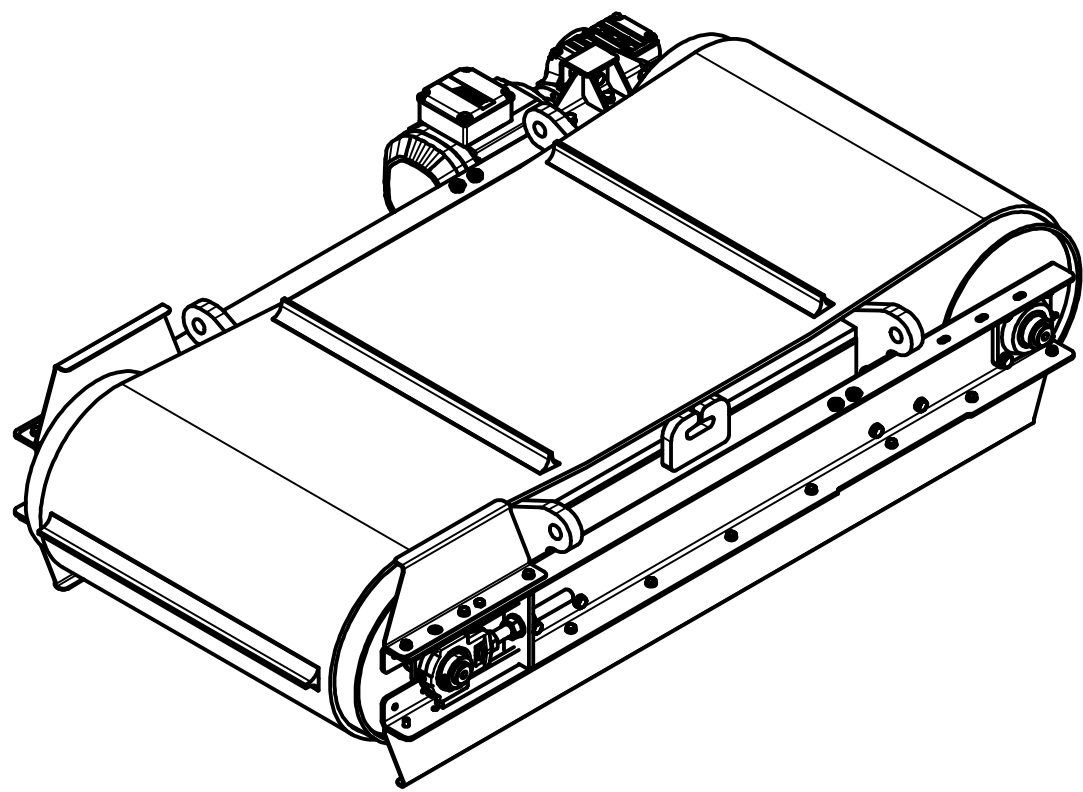
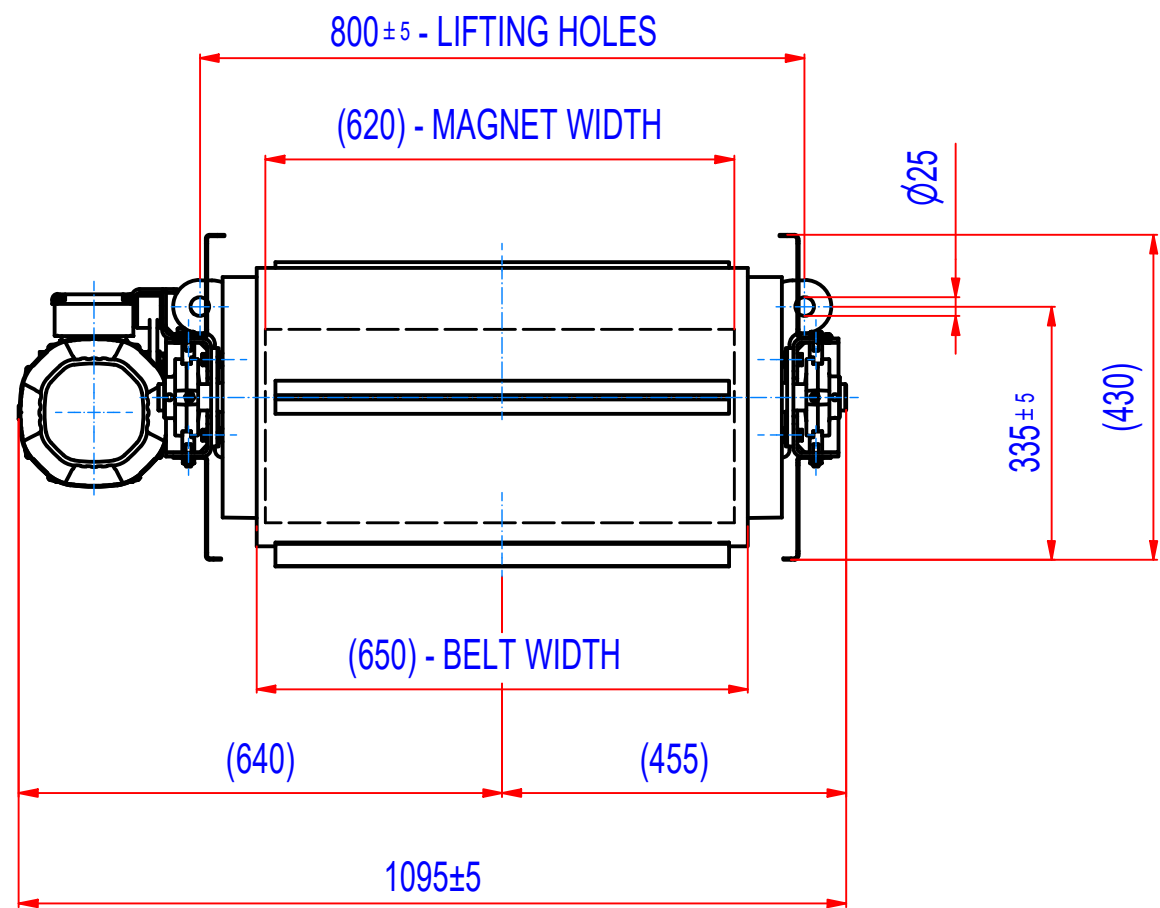


REV	BY	DATE	DESCRIPTION
-	EN	13.04.2018	New Vault, nothing changed
A	LF	23.10.2021	MOTOR 2,2kW, IP55 (WAS 1,5kW, IP54)

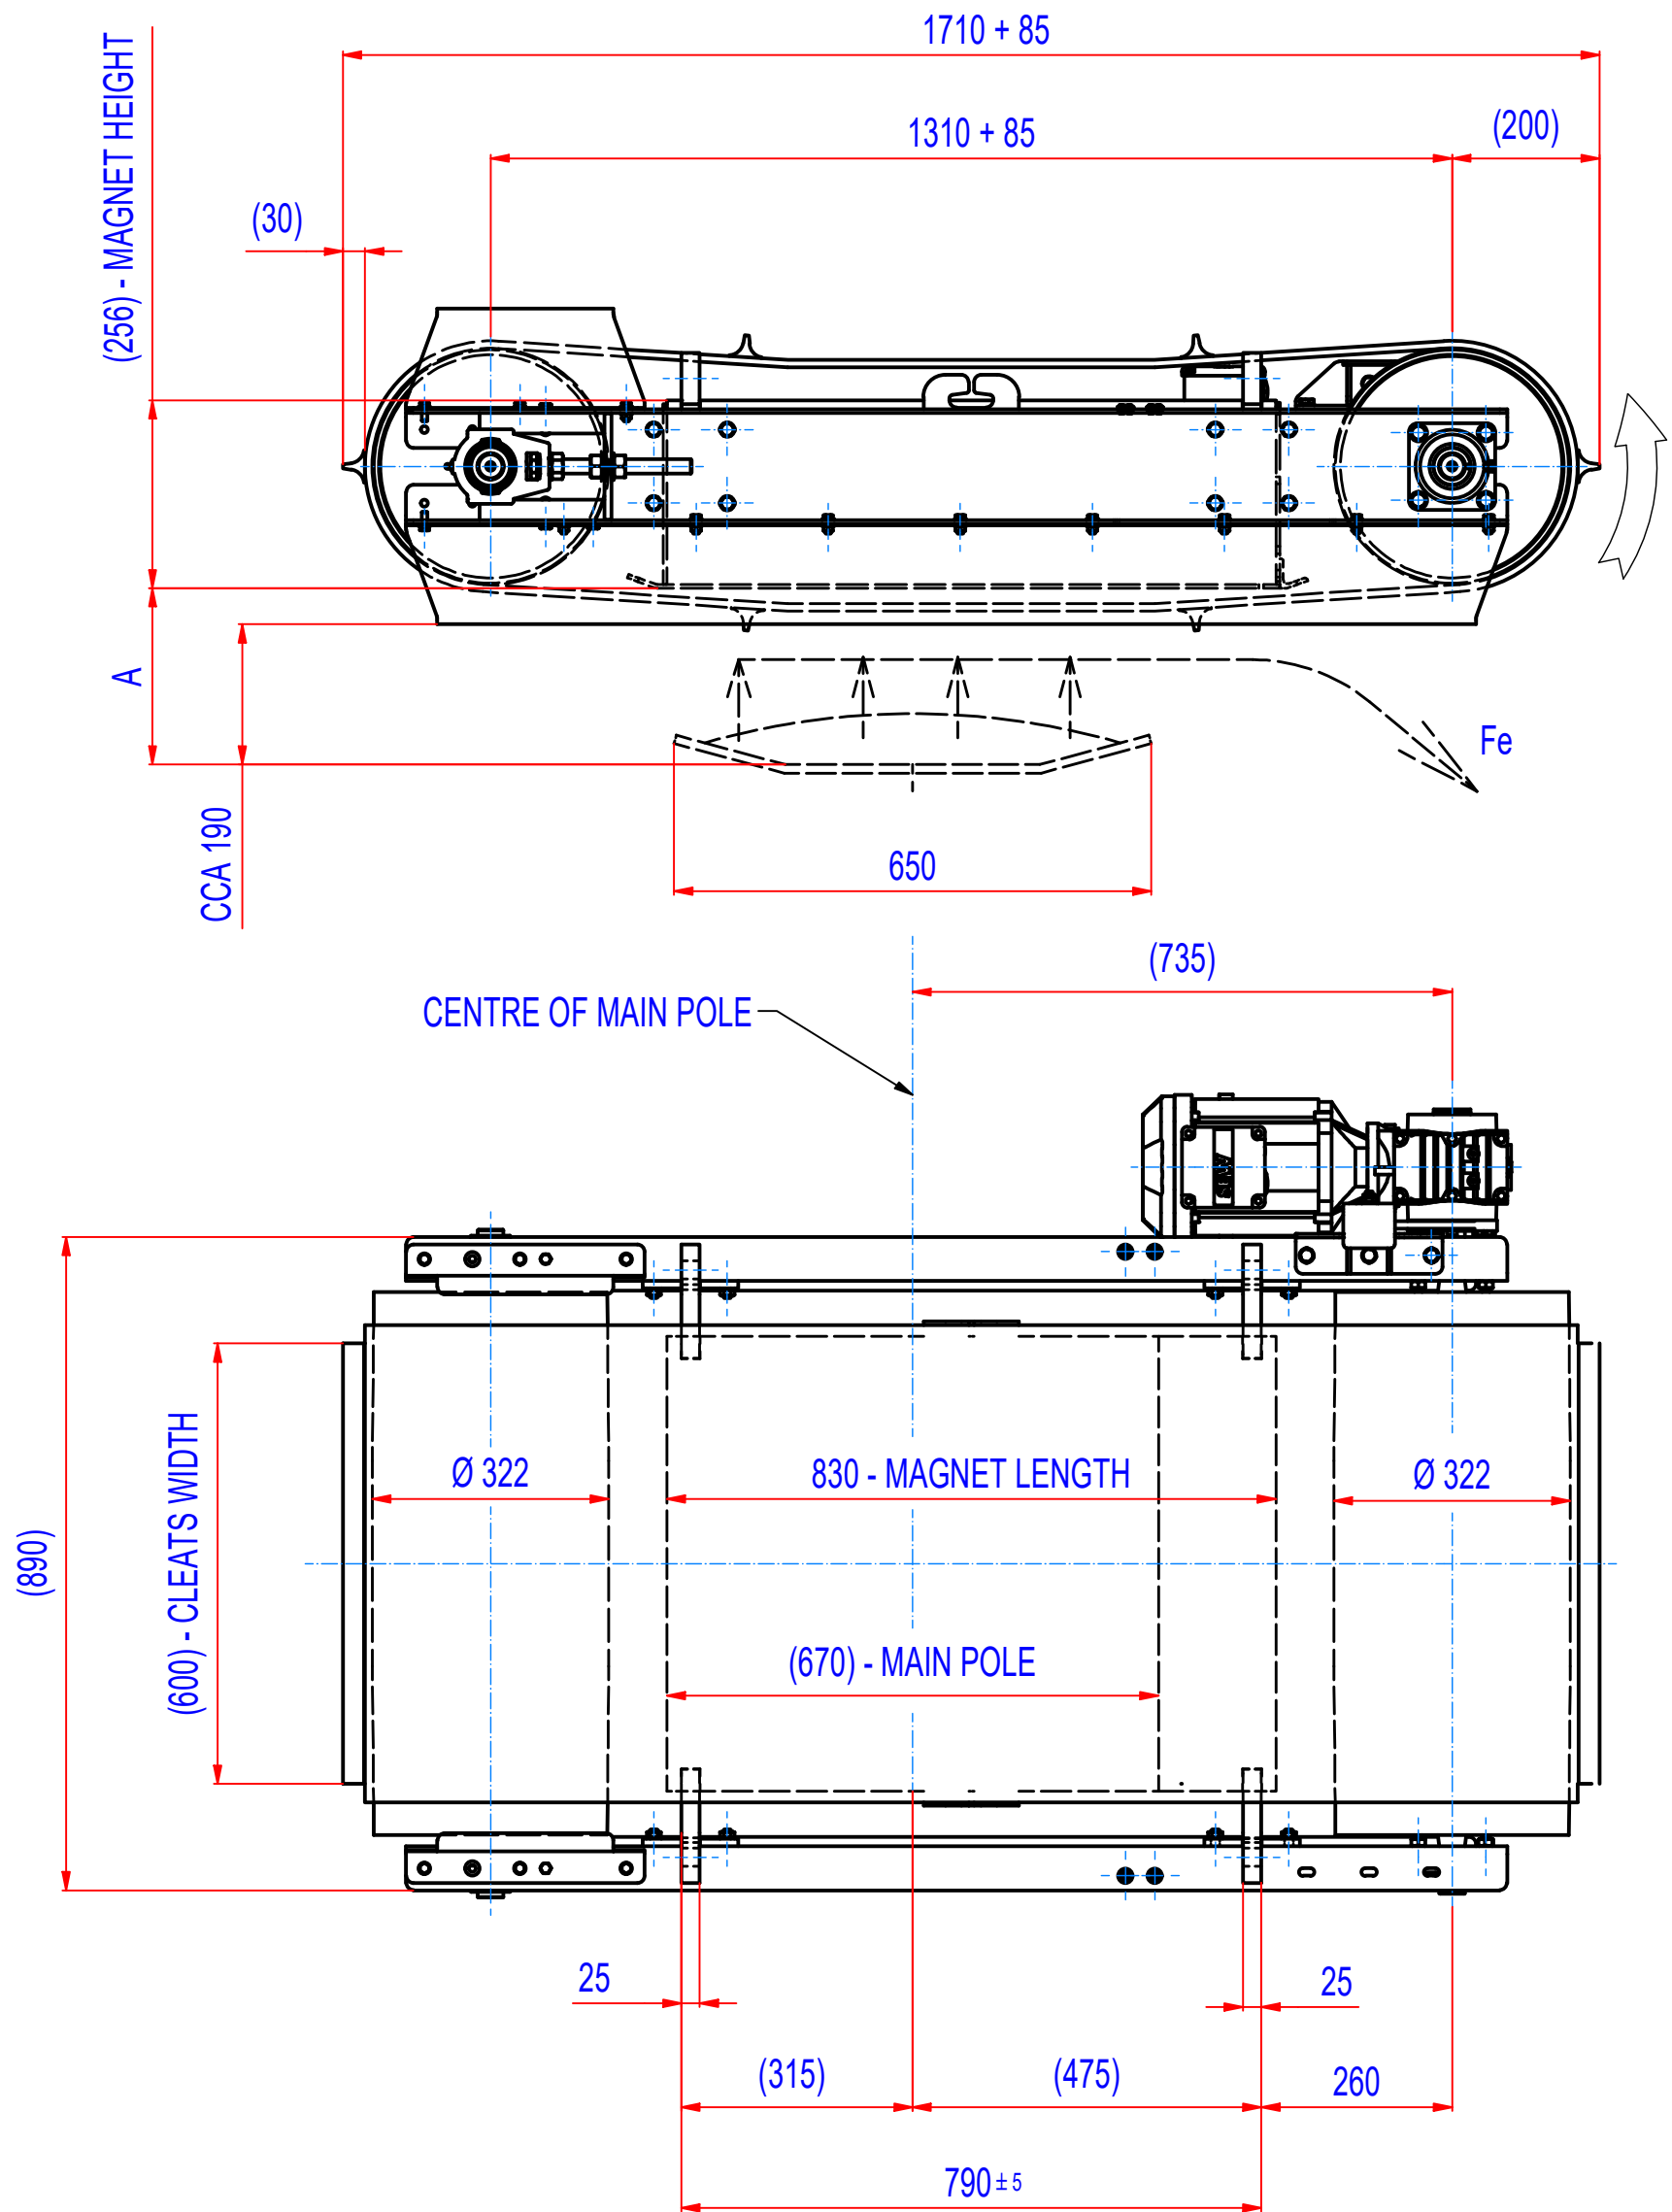

A = 320 mm - max. catch distance for rod $\varnothing 15$, L=75 mm (VDE)
A = 240 mm - 400 Gs

- GEARED BOX SEW SA57/TDRN100LS4, i=14,24 (102RPM), MOTOR 230/400V, 2,2 kW, 50Hz, IP55
- DRUM SPEED 102/min
- BELT SPEED 1,7 m/s
- BELT EP400/3 4+2, WIDTH 650, LENGTH 3680, 6 CLEATS T30/10, WIDTH 600

Sheet: A2	Extra info:	General tolerance: ISO 2768 - cL
Drawn: EN	Weight (kg): 779,7	Drawn according: ISO268; ISO1101; ISO2553
Date: 31.10.2022		Status:
Predecessor: SEPB065033		Customer reference number:
Quick search: XSPB 3		Product key: ROP-F3-C-065-W-G-L-B-B-NA
Description: Overband separator, Ferrite, Size 3, W0650, Cross		Part number: ROFC065330
		Rev: A